

C16 WOOD 120 55

16,0 KW
MOR1200AG



TECHNOLOGY



OPTIONAL



Potenza Globale
Global Power
Puissance globale
Potencia global
Verbrennungsleistung

KW 16

Rendimento totale
Total efficiency
Puissance globale
Potencia global
Gesamtausbeute

% 78

Volume riscaldabile
Heating volume
Beheizbares Volumen
Volume caïlable
Volume de réchauffement

mc 390

Consumo MAX
Max consumatio
ConsumationMAX
Consumo maxi
Maxi verbrauch

Kg/H 4,1

Portata Ventilatore
Fan Range
Gebläse Förderleistung
Caudal de ventilación
Débit du ventilateur

mc/h 430

Uscita fumi
Chimney Output
Sortie conduit de cheminée
Salida conducto de humos
Rauchauslass

mm 250

Ingresso aria
Air intel
Entrée d'air
Entrada aire
Lufterlass

mm 120

2 uscite aria calda
2 warm air outlets
2 Warmluftausgänge
2 salidas de aire caliente
2 sorties d'air chaud




mm 120

Peso
Weight
Poids
Peso
Gewicht

Kg 287

Camera di combustione
Burnig chamber
Chambre de combustion
Camara de combustion
Brennraum

mm 1150x380

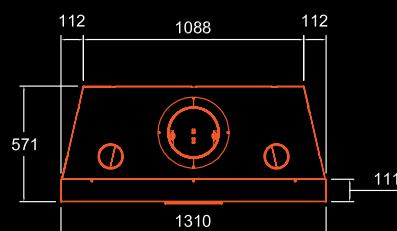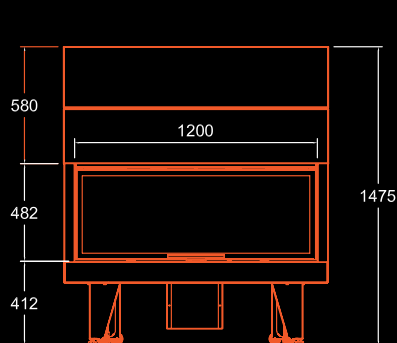

MORETTIDESIGN®